

IKO Ener-Air™ Sheathing

WALL INSULATION

STOCK# 41842XX

SIZE: 122 cm x 244 cm (4 ft x 8 ft)

122 cm x 274 cm (4 ft x 9 ft)

AVAILABLE THICKNESSES**

4184200 - 12 mm (0.5 in)

4184201 - 16 mm (0.625 in)

4184202 - 18 mm (0.75 in)

4184203 - 25 mm (1.0 in)

4184208 - 38 mm (1.5 in)

4184213 - 50 mm (2.0 in)

PIECES PER PALLET:

12 mm (0.5 in) - 96, 16 mm (0.625 in) - 76

18 mm (0.75 in) - 64, 25 mm (1.0 in) - 48

38 mm (1.5 in) - 32, 50 mm (2.0 in) - 24

**Special sizes available upon request.

IKO's AccuCut service allows further
specialty board dimensions.

Note: All reported values are nominal.

 **COMMERCIAL**



Let IKO Ener-Air
Wall Insulation go
to work for your
next commercial
building project.

IKO Ener-Air Sheathing

WALL INSULATION

Glass Fiber-Faced Poliso

IKO Ener-Air is a rigid, polyisocyanurate foam insulation with high thermal properties. It is constructed from closed cell polyisocyanurate foam core reinforced and bonded on each side to coated glass fiber facers during the manufacturing process. IKO Ener-Air is designed to be a non-structural sheathing in cavity wall, stud wall, exterior insulation or cathedral ceiling construction.

Built to Perform

Building owners and construction professionals are demanding more and more highly engineered building materials. IKO Ener-Air Sheathing Systems meet and exceed those expectations, especially designed with new acoustic properties, bringing maximum weather resistance and quiet comfort to structures.

Multi-Purpose

IKO Ener-Air is a dimensionally stable air barrier with a high water vapour permeance and excellent water shedding capabilities. When used with AquaBarrier™ VP Tapes, it can act as a vapour-permeable, insulated Weather Resistive Barrier (WRB) system for exterior walls. The system offers three major benefits, all in one!

- Insulation
- Weather Resistive Air Barrier
- Controls Sound

Cost Effective


IKO Ener-Air has a high thermal R-value (6 per inch) that provides outstanding insulation protection, which helps to reduce energy costs and increase efficiency.



- OUTSTANDING R-VALUE
- VAPOUR PERMEABLE
- NOISE REDUCING
- LOW ODOUR EMISSION

IKO Ener-Air™ Sheathing

WALL INSULATION

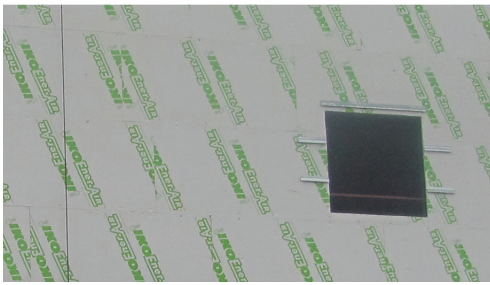

IKO Ener-Air Wall Insulation is produced according to the requirements of CAN/ULC S704 for Type 1, Class 3 materials and as a Type II Class 1 Grade 1 material, per ASTM C1289. All local safety rules and precautions should be followed when working with IKO products. See also Material Safety Data Sheet MSDS #1911.

Good building practices include ensuring the application surface is adequately prepared for the installation of the product. For further details, please refer to the "IKO Installation Guidelines."

CHARACTERISTICS	UNITS	NOMINAL VALUE	TEST METHOD
Compressive Strength:	kPa (psi)	110 (16)	ASTM D1621
Tensile Strength:	kPa (psi)	>24 (>3.48)	ASTM D1623
Flexural Strength MD/XD:	kPa (psi)	607 / 497 (88 / 72)	ASTM C203
Water Absorption:	% Vol.	3.5	ASTM C209
Dimensional Stability @ 70°C MD/XD:	%	±2 / ±2	ASTM D2126
Thermal Resistance ² (R-Value/RSI) – Conditioned Per ASTM C1289:	Btu·hr·ft ² ·°F (m ² ·°C/W)	0.5 in – 3.0 (0.54) 0.625 in – 3.75 (0.70) 0.75 in – 4.5 (0.81) 1.0 in – 6.0 (1.05) 1.5 in – 9.0 (1.58) 2.0 in – 12 (2.10)	ASTM C518
Long Term Thermal Resistance (LTTR) ³ [R-Value/RSI]:	Btu·hr·ft ² ·°F (m ² ·°C/W)	1.0 in – 5.6 (0.99)	CAN / ULC S770
Water Vapour Transmission Rate (WVTR):	ng/Pa·s·m ² (perms)	>60 (>1)	ASTM E96 (Method B)
Air Permeability @75pa:	L/s·m ²	<0.02	ASTM E2178
Air Leakage:	L/s·m ²	Class A1	CAN/ULC S742-11 / ASTM E2357-11 ¹
Flame Spread:	–	<500 / <75	CAN/ULC-S102 / ASTM E84
Smoke Developed:	–	<55 / <450	CAN/ULC-S102/ ASTM E84
Service Temperature:	°C (°F)	-40 to 100 (-40 to 212)	–
Width Tolerance:	mm (in)	±4.0 (±0.16)	ASTM E96
Length Tolerance:	mm (in)	±2.0 (±0.08)	–
Sound Transmission Class (STC):	–	14 – 15	ASTM E90 (09)
Odour Emission:	–	Pass	ASTM C1304 (08)-2013

¹When joints & penetrations detailed appropriately. ²Stated thermal resistance values are based upon conditioning requirements and test methodology found in ASTM C1289 and ASTM C518. ³As a conservative estimate for long-term thermal resistance design value, 5.6 (0.99) per inch thickness is typically used.

All values shown are approximate. The information on this sheet is based on data considered to be true and accurate based on periodic internal testing and production measurements at time of manufacture. The information is offered solely for the user's consideration, investigation and verification, and is subject to change without notice. Nothing contained herein constitutes or represents a warranty or guarantee for which the manufacturer can be held legally responsible. IKO assumes no responsibility for errors that may appear in this document.