

FIBERGLASS- REINFORCED ASPHALT ACCESSORY SHINGLES

Our specially constructed ridge cap shingles are designed to provide a high-quality alternative to using cut-up roof shingles to protect this important area. The “HP” stands for “High Profile,” which means that they’re also designed to add dimension, depth and texture to your roof line and rakes. They’re available in a limited color range to complement selected IKO laminated shingle products. There’s only one way you can top your roof’s long-lasting good looks – with IKO UltraHP ridge cap shingles!

Click [here](#) or scan this QR code for product literature, color swatches and color availability.



UltraHP is a preformed, two-layer, hip and ridge accessory asphalt shingle, manufactured on a robust fiberglass reinforcement.

FEATURES AND BENEFITS

- ✓ PREFORMED AND PRECUT
- ✓ NO CUTTING OR FOLDING
- ✓ BLUE-GREEN ALGAE RESISTANT
- ✓ POLYMER-MODIFIED COATING

GENERAL INFORMATION

SHINGLES/BUNDLE	30
COVERAGE/BUNDLE	20 linear ft. (6.1 linear m)
BUNDLES/PALLET	42
PALLET SIZE	46 x 54 in. (117 x 138 cm)
PRODUCT STOCK NO.	4560XXX

NOTE: XXX refers to numerical product color code. Product color availability varies by region.

PRODUCT DIMENSIONS

LENGTH	11 1/2 in. (292 mm)
WIDTH	10 in. (254 mm)
EXPOSURE	8 1/4 in. (210 mm)

Product dimensions shown are subject to normal manufacturing tolerances of +/- 1/8 in. (3 mm) on the shingle’s length and width.



APPLICABLE STANDARDS¹

ASTM D3462 Product Standard

ASTM D3018 Product Standard

ASTM D3161 Class F Wind Test

ASTM D7158 Class H Wind Test

ASTM E108 Class A Fire Test²

UL 790 Class A Fire Test²

CAN/ULC S107 Class A Fire Test (Canada)²

CSA A123.5 Product Standard (Canada)

Texas Department of Insurance Details [here](#)

NOTE: IKO UltraHP asphalt shingles meet or exceed the requirements in the product standards referenced at the time of manufacture, including minimum total product weight, minimum tear-strength resistance, maximum granule loss and minimum asphalt mass.


SAFETY INFORMATION

CAUTION: Working at heights on sloped-roof surfaces can be dangerous. Do not install until all appropriate safety precautions are followed. Always wear appropriate personal protective equipment (PPE), including appropriate fall protection equipment.

This product's Safety Data Sheet (SDS) is available [here](#).



SHINGLE INSTALLATION

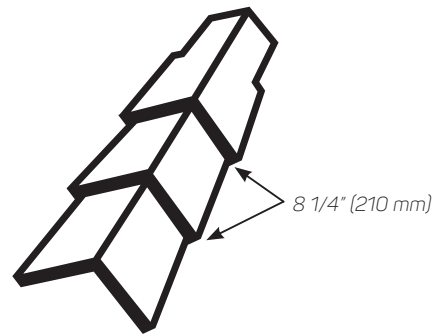

Shingles must be installed according to all of IKO's application instructions. Some select installation requirements are highlighted here:

1. The space beneath the roof deck (e.g., attic) should be thoroughly ventilated to minimum local building code requirements.
2. Apply the shingles with an 8 1/4-inch exposure to the weather (even with the notch on the sides of the shingle).
3. Form the shingle to the roof deck prior to nailing. For lower slopes, it may be necessary to push down slightly on the center of the shingle. For steeper roofs, it may be necessary to push down slightly on the sides of the shingle.
4. When used in conjunction with a ridge vent, a vent width of 9 inches or less is required.
5. Cover the exposed nail heads of the final ridge cap shingle with roofing cement.

Complete product installation details can be found [here](#).



The information on this Technical Data Sheet is based upon data considered to be true and accurate at time of issue, based on laboratory tests and production measurements, and is offered solely for the user's consideration, investigation and verification. Nothing contained herein is representative of a warranty or guarantee for which the manufacturer can be held legally responsible. The manufacturer does not assume any responsibility for any misrepresentation or assumptions the reader may formulate. To confirm the most current product technical information and compliances, please contact IKO directly at: **United States 1-888-IKO-ROOF (1-888-456-7663); Canada 1-855-IKO-ROOF (1-855-456-7663).**

¹Compliance with listed product standards is based on sampling and testing of products as manufactured. ²When installed over an approved underlayment, in conjunction with an approved IKO shingle. For more information, please contact IKO at: **1-888-IKO-ROOF (1-888-456-7663).**