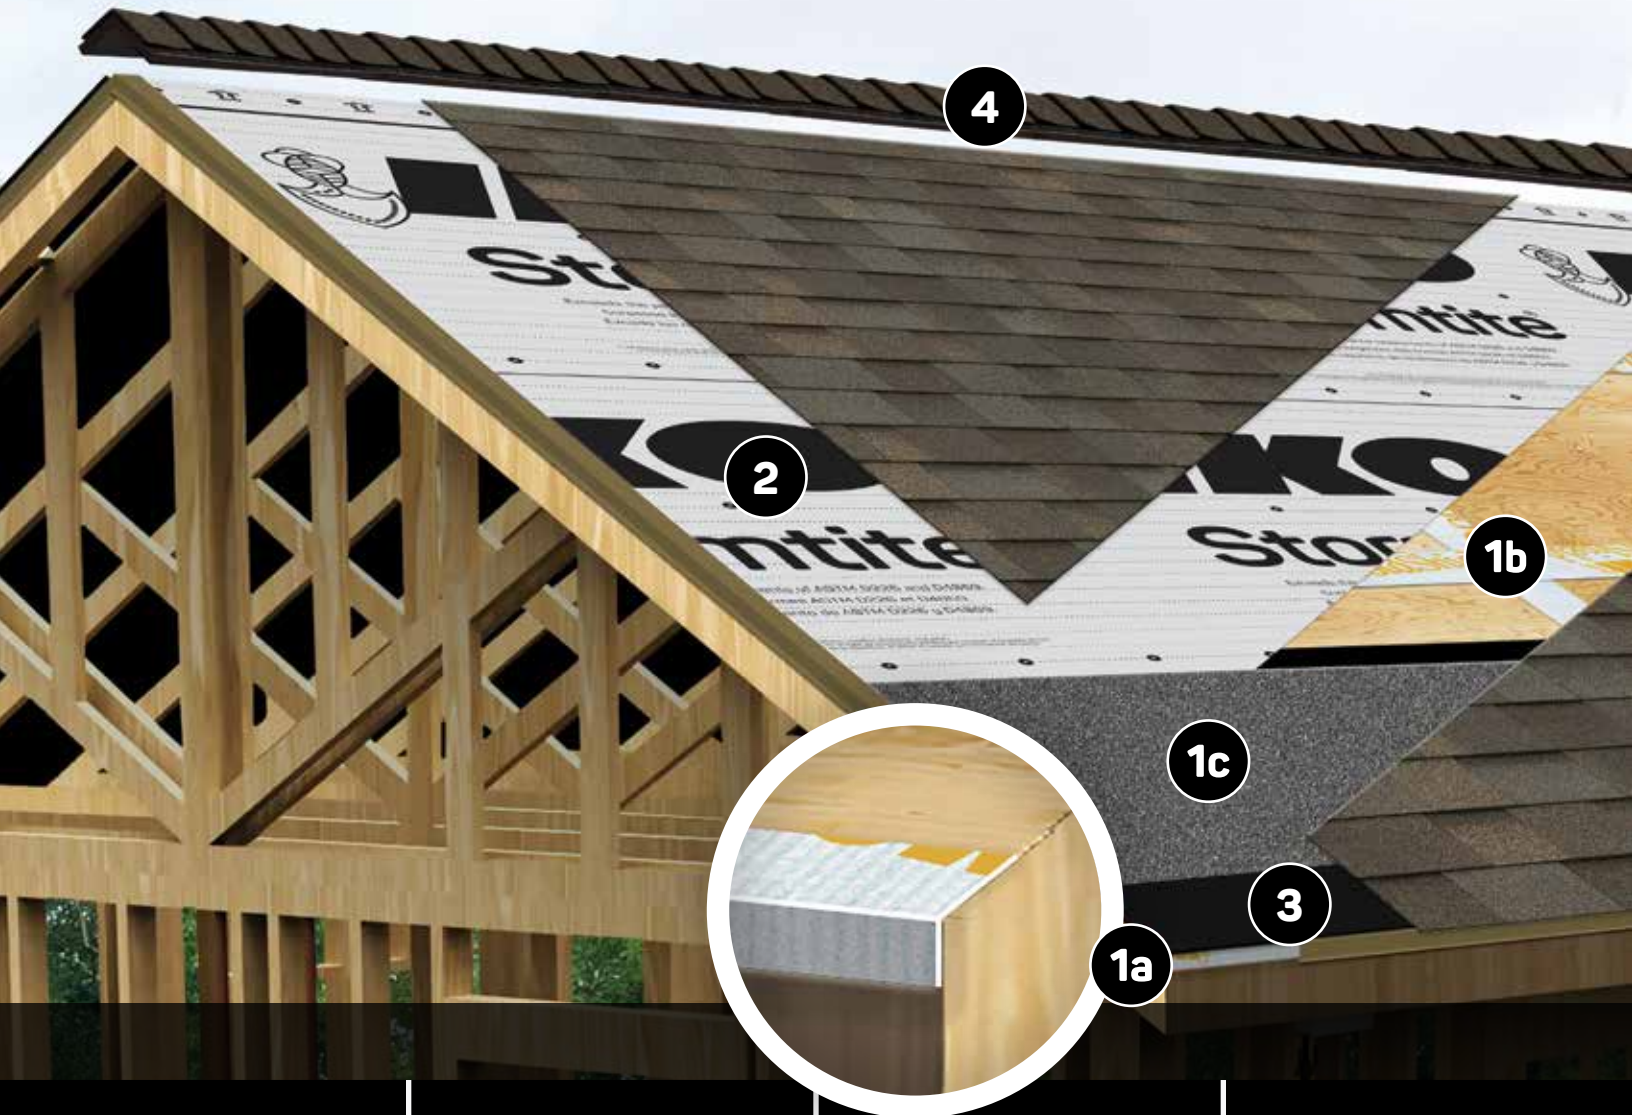




# PROFORMAX™

INTEGRATED ROOFING ACCESSORIES

Shingles are your home's first line of defense. They protect, perform and look their best installed with the recommended **IKO Proformax Integrated Roofing Accessories** shown below.



**DECK  
PROTECTION**



**SYNTHETIC  
UNDERLAYMENT**



**ROOF  
STARTERS**



**CAPPING  
SHINGLES**



Meet the Complete Roof System -  
PROFORMAX Building System

See reverse side for additional details. →

## DECK PROTECTION

**GoldSeam®**

Use IKO GoldSeam to seal between the eave and fascia.

**Size:** 66.7' (20.32 m) x 4.25" (108 mm)

**Box Contents:** 66.7 lin ft./ roll

**Units per Pallet:** 150

Product dimensions shown are subject to normal manufacturing tolerances of +/- 0.5 ft. (0.15 m) on the sheet's length and +/- 1/8 in. (3 mm) on width.

**GoldSeam®**

Use IKO GoldSeam Tape to seal roof deck seams.

**Size:** 66.7' (20.32 m) x 4.25" (108 mm)

**Box Contents:** 66.7 lin ft./ roll

**Units per Pallet:** 150

Product dimensions shown are subject to normal manufacturing tolerances of +/- 0.5 ft. (0.15 m) on the sheet's length and +/- 1/8 in. (3 mm) on width.

## DECK PROTECTION

**StormShield®**

A resilient ice and water protector used primarily for waterproofing purposes.


**Size:** 65' (19.8 m) x 36" (914 mm)

**Roll Contents:** 195 sq. ft. (18.1 m<sup>2</sup>)

**Units per Pallet:** 44

Product dimensions shown are subject to normal manufacturing tolerances of +/- 0.5 ft. (0.15 m) on the sheet's length and +/- 1/8 in. (3 mm) on width.

## SYNTHETIC UNDERLAYMENT

**Stormtite®**

Synthetic underlayment engineered to be used under asphalt shingles.

**Size:** 250 ft (76.2 m) x 48" (1,219 mm)

**Roll Contents:** 1000 sq ft (92.9 m<sup>2</sup>)

**Units per Pallet:** 56

Product dimensions shown are subject to normal manufacturing tolerances of - 0.5 to + 1 ft. (- 0.15 to + 0.30 m) on the sheet's length and +/- 1/4 in. (6.4 mm) on width.

## ROOF STARTERS

**EdgeSeal®**

Helps prevent wind uplift and blow-off in the critical areas where shingles are most vulnerable — the roof perimeter along the eaves and rakes.

**Size:** 67.3' (20.5 m) x 8.75" (222 mm)

**Box Contents:** 269.2 lin ft. (82 lin m) /4 rolls

**Units per Pallet:** 120 rolls (30 boxes)

Product dimensions shown are subject to normal manufacturing tolerances of +/- 0.5 ft. (0.15 m) on the sheet's length and +/- 1/8 in. (3 mm) on width.

**Leading Edge Plus™**

This starter course provides a guide for the first course of shingles and adds an extra layer of asphalt protection around the entire roof perimeter.

**Size:** 40-7/8" (1,038 mm) x 7-7/8" (200 mm)

**Bundle Contents:** 123 lin ft. (37 lin m)

**Units per Pallet:** 45

Product dimensions shown are subject to normal manufacturing tolerances of +/- 1/4 in. (6 mm) on the shingle's length and +/- 1/8 in. (3 mm) width.

## CAPPING SHINGLES

**UltraHP® IR<sup>1,2</sup> or UltraHP®**


Preformed, precut cap shingles protect and beautify. No cutting or folding.

**Size:** 11-1/2" (292 mm) X 10" (254 mm)

**Box Contents:** 20 lin ft. (6.1 lin m)

**Units per Pallet:** 42

Product dimensions shown are subject to normal manufacturing tolerances of +/- 1/8 in. (3 mm) on the shingle's length and width.

**Hip & Ridge 12™<sup>1,2</sup> or Hip & Ridge Class 4<sup>1,2</sup>**

Ridge cap shingles protect and beautify. Pre-tapered and perforated, no cutting required.

**Size:** 36" (914 mm) X 13-1/4" (337 mm)

**Bundle Contents:** 36.5 lin ft. (11.1 lin m)

**Units per Pallet:** 56

Product dimensions shown are subject to normal manufacturing tolerances of +/- 1/4 in. (6 mm) on the shingle's length and +/- 1/8 in. (3 mm) width.

The information in this literature is subject to change without notice. We assume no responsibility for errors that may appear in this literature. **NOTE:** Not all products are available in all regions. Please ask your IKO sales representative for more information on product and color availability. Unless specifically denoted, all accessories can be used with all shingles. <sup>1</sup>IKO Hip & Ridge Class 4 and IKO UltraHP IR have a Class 4 impact resistance rating and IKO Hip & Ridge 12 have a Class 3 impact resistance rating. IKO recommends the use of its Class 4 impact resistance rated hip and ridge cap shingle in conjunction with the use of Class 4 impact resistance rated shingles, and the use of no less than its Class 3 impact resistance rated hip and ridge cap shingle in conjunction with the use of Class 3 impact resistance rated shingles. <sup>2</sup>IKO Hip & Ridge 12 capping shingles have a Class 3 impact resistance rating and Hip & Ridge Class 4 capping shingles have a Class 4 impact resistance rating tested against FM 4473. IKO UltraHP® IR capping shingles have a Class 4 impact resistance rating tested against UL 2218. IKO is pleased to present these shingles for the sole purpose of enabling homeowners using these shingles in conjunction with Class 3 or Class 4 impact resistance rated shingles, to obtain a discount on their home insurance premiums, if available in their area. This rating is not to be construed as any type of express or implied warranty or guarantee of the impact performance of this shingle by the manufacturer, supplier or installer. For further detail concerning the FM 4473 and UL 2218 standards, visit the FM Approvals and UL Standards websites.



To find out more about the PROFORMAX accessory products or additional IKO products, please talk to an IKO sales representative, a professional roofing contractor, or contact IKO directly.

Canada 1-855-IKO-ROOF (1-855-456-7663)

United States 1-888-IKO-ROOF (1-888-456-7663)

Visit us online at: **IKO.COM**

