



# RoofGard-Cool Grey™



## SYNTHETIC ROOF UNDERLAYMENT

IKO's RoofGard-Cool Grey rolls are lighter and easier to handle than felt rolls, making it faster to install. The synthetic, non-breathable material is easy to install around vents, dormers, and other roof structures too. UV stabilizers allow for up to three months exposure before shingle installation. And since it's grey instead of black, it absorbs less of the sun's radiant heat. Lay lines printed every 1" (2.5 cm) aid in shingle course alignment.

Click [here](#) or scan this QR code for product literature.



RoofGard-Cool Grey is a synthetic steep slope roof underlayment.

### FEATURES AND BENEFITS

- ✓ STRONGER AND LIGHTER THAN FELT
- ✓ SUPERIOR FLEXIBILITY
- ✓ NON-BREATHABLE

### GENERAL INFORMATION

AREA/ROLL	1000 ft. <sup>2</sup> (92.9 m <sup>2</sup> )
ROLLS/PALLET	48
PALLET SIZE	40 x 48 in. (102 x 122 cm)
PRODUCT STOCK NO.	0520021

### PRODUCT DIMENSIONS

LENGTH	250 ft. (76.2 m)
WIDTH	48 in. (1,219 mm)
LAP LINE	4 in. (102 mm)

*Product dimensions shown are subject to normal manufacturing tolerances of - 0.5 to + 1 ft. (- 0.15 to + 0.30 m) on the sheet's length and +/- 1/4 in. (6.4 mm) on width.*

# RoofGard-Cool Grey™

## APPLICABLE STANDARDS<sup>1</sup>

ASTM D8257 Product Standard

**NOTE:** IKO RoofGard-Cool Grey meets or exceeds the requirements in the product standard referenced, including minimum tear strength resistance and flexibility.

## SAFETY INFORMATION


**CAUTION:** Working at heights on sloped-roof surfaces can be dangerous. Do not install until all appropriate safety precautions are followed. Always wear appropriate personal protective equipment (PPE), including appropriate fall protection equipment.

This product's Safety Data Sheet (SDS) is available [here](#).




## ROOFGARD-COOL GREY INSTALLATION

Underlayment

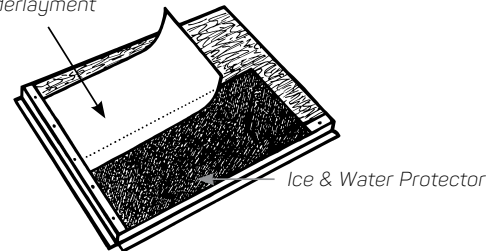

Underlayment



The underlayment must be installed according to all of IKO's application instructions. Some select installation requirements are highlighted here:

1. The space beneath the roof deck (i.e., attic) should be thoroughly ventilated to minimum local building code requirements.
2. Ensure a minimum of 4-inch side laps and 6-inch end laps.
3. Attach RoofGard-Cool Grey to the roof with roofing nails or staples having one inch diameter plastic/metal caps.
4. In high wind zones or coastal areas, fastening spacing may need to be increased. Consult local building codes.

Complete product installation details can be found [here](#).



The information on this Technical Data Sheet is based upon data considered to be true and accurate at time of issue, based on laboratory tests and production measurements, and is offered solely for the user's consideration, investigation and verification. Nothing contained herein is representative of a warranty or guarantee for which the manufacturer can be held legally responsible. The manufacturer does not assume any responsibility for any misrepresentation or assumptions the reader may formulate. To confirm the most current product technical information and compliances, please contact IKO directly at: **United States 1-888-IKO-ROOF** (1-888-456-7663); **Canada 1-855-IKO-ROOF** (1-855-456-7663).

<sup>1</sup>Compliance with listed product standards is based on sampling and testing of products as manufactured. For more information, please contact IKO at: **1-888-IKO-ROOF** (1-888-456-7663).